

nifty

HR15

SELF PROPELLED ACCESS PLATFORM



15.75m (51ft 8in)
Working height

9.60m (31ft 6in)
Working outreach

2.00m Chassis Width
Allowing operation in
confined areas

45% Gradeability
4WD for rough terrain

**Fully Proportional
Hydraulic Controls**
Simple, reliable &
easy to maintain

1.80m Wide Platform
More room for tools
& equipment

**Platform Rotation
& Flyboom**
Improved access to applications



niftylift.com




nifty

Heightrider 15


The Nifty **Height Rider 15** offers one of the best working envelopes in its class and its compact yet robust base allows it to manoeuvre easily in restricted areas. A huge 1.80m wide platform provides more room for materials and tools and a 150° flyboom with platform rotation, helps to increase accuracy when positioning. Operation and maintenance are simple due to fully proportional hydraulic controls and the 4WD allows the **HR15** to travel over rough and uneven ground.

SAFETY FEATURES

- Manual Recovery with Hand Pump
- Dual Controls (Platform & Base)
- Dual Harness Points
- Tilt Alarm
- CE Mark
- Foam Filled Tyres
- Automatic Failsafe Brakes
- Lock Valves on all Hydraulic Cylinders

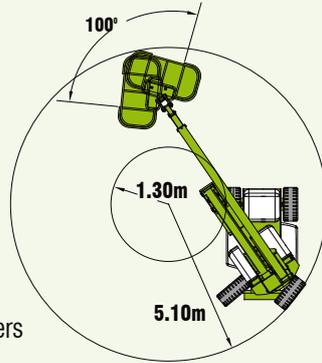

The unique suspension system shown above ensures maximum traction when travelling over uneven surfaces and the spacious 1.80m wide platform allows the operator ample room for tools and materials.

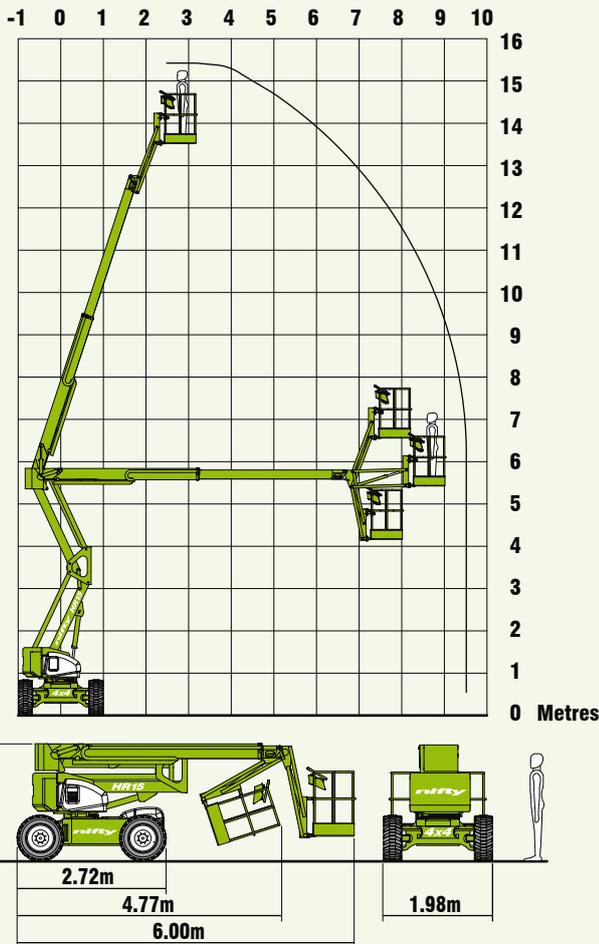

SPECIFICATIONS

| | | |
|--------------------------------|------------------|--------------------|
| Working Height | 15.75m | 51ft 8in |
| Platform Height | 13.75m | 45ft 1in |
| Working Outreach | 9.60m | 31ft 6in |
| Slew | 360° | |
| Flyboom Arc | 150° | |
| Width | 2.00m | 6ft 7in |
| Height | 2.10m | 6ft 11in |
| Length - Overall | 6.00m | 19ft 8in |
| - Stowed | 4.80m | 15ft 9in |
| Minimum Weight | 5,800kg* | 12,800lbs* |
| Turning Radius - Inside | 1.30m | 4ft 3in |
| - Outside | 5.10m | 16ft 9in |
| Platform Rotation | 100° | |
| Platform Capacity | 225kg | 500lbs |
| Platform Size | 1.80m x 0.70m | 5ft 11in x 2ft 4in |
| Drive Speed | 6.6kph | 4.1mph |
| Gradeability | 45% | |
| Power System | Kubota 1505 32Hp | |

* Weights may vary according to specification, please confirm before ordering.

Due to a policy of continuing development and improvement, Niftylift reserves the right to change any specification without notice. Please confirm exact specification before ordering.

Supplied by:

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.

NIFTYLIFT LTD
Fingle Drive
Stonebridge
Milton Keynes
MK13 0ER
England

www.niftylift.com

e-mail: info@niftylift.com
Tel.: +44 (0) 1908 223456
Fax.: +44 (0) 1908 312733

