SL26SL/SL30SL

SPEED LEVEL



- The original Speed Level sigma lift
- Gimbs gradients of up to 50%
- Auto-levelling without the need for outriggers
- Suitable for most terrains
- Powerful 4x4drive
- Ideal for rough terrain or work at height on sloped ground



SPEED LEVEL

SL26SL/SL30SL

D IMEN SIO N S	SL26SL	SL30SL
Max working height	10.0m	11.0m
Max platform height (A)	8.0m	9.0m
Platform size (stowed)	1.72m x 3.66m	1.72m x 4.23m
Platform size (extended)	1.72m x 4.61m	n/a
Overall width (D)	2.13m	2.13m
Overall length (C)	3.79m	4.39m
Stowed height (B)	2.6m	2.6m
Min. height (guardrails folded)	1.5m	1.5m
C hassis ground clearance	320mm	320mm
A xle ground clearance	200mm	200mm

PERFO RMANC E			
Platform capacity (SWL)	680kg	590kg	
Max drive height	8. 0m	9. 0m	
Max drive speed (stowed)	5. 2km/h	5. 2km /h	
Max drive speed (elevated)	0.8km/h	0.8km/h	
Raise/lower time	21/32 seconds	24/36 seconds	
G radeability	50%	50%	
Max levelling, front to rear	9º	9º	
Max levelling, side to side	13°	13°	
Inside turning radius	3. 9m	3.9m	
Tyres	26 x 12.00 - 12 NHS Supa Terra-Grip, poly filled		
Controls	Proportional joystick		
D rive system	4 wheel drive with hydraulic motors		

PO WER			
Power source	Perkins diesel, water o	Perkins diesel, water cooled engine	
WEIG HT			
G ross weight	3,085kg	3,400kg	

A B C C


STANDARD FEATURES

- Diesel power
- Rated for up to 5 people plus tools
- Descent alarm
- Hour meter
- Speed level automatic powered platform levelling
- 0 scillating front axle
- Poly filled high grip tyres
- Dual multi-disc brakes
- One-hand, proportional controls
- Power line to platform (no sockets)
- Fold-down guardrails
- CE approved

O PTIO N S

- Special paint colours
- All motion alarm
- Flashing amber beacon and horn
- Diesel exhaust scrubber
- Environmental green oil

LEVELLING CAPABILITIES

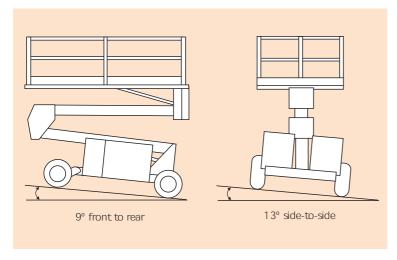



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

> t +44 (0) 845 1550 057 e: sales@snorkellifts.com